




Rag Rug in Maintenance

RR

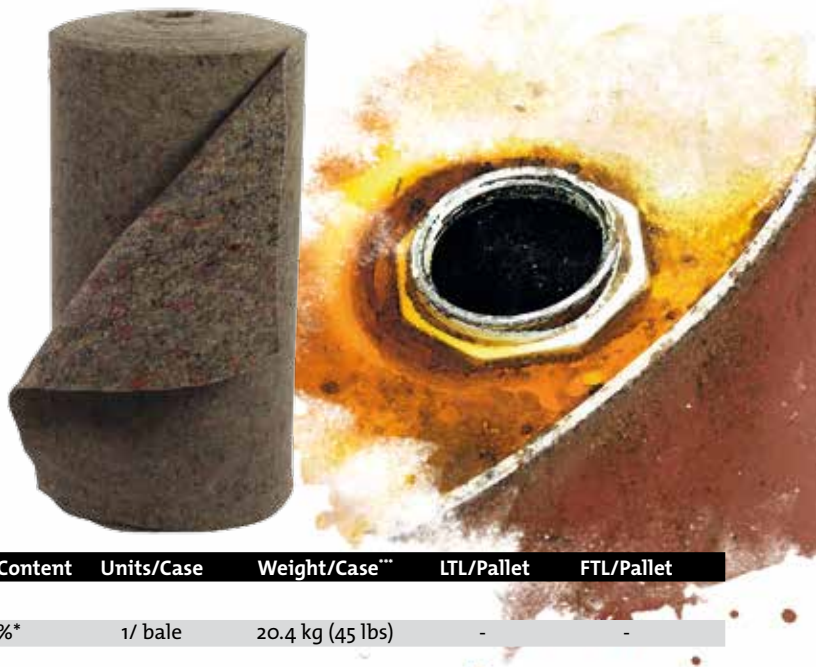

Rag Rug | Maintenance

Basis weight: -

Absorbency: 218 Litres | 48 US Gallons of oil**


177 Litres | 39 US Gallons of water**

Base Fibre: Polypropylene

Mixed Fibres

Product Code	Colour	Format	Size cm(inches)	Recycled Content	Units/Case	Weight/Case***	LTL/Pallet	FTL/Pallet
Maintenance								
RR	Mixed	Maintenance	91 cm x 46 m (36" x 150')	100%*	1/ bale	20.4 kg (45 lbs)	-	-

Rag Rug



This product is in a Maintenance format



This product features recycled and natural fibres

Description

Constructed from a single layer of 100% recycled natural and synthetic fibers, this roll will absorb both oil- and water-based spills.

Key features

- One of the most excellent value absorbent products anywhere
- Needle-punched and heat-set single layer of recycled fibers make rugs sturdy, long lasting and extremely absorbent

Application

Use it in strips in narrow spaces or simply lay out long rolls alongside machines, on walkways, or wherever you need heavy-duty, absorbent rugs. Use rolls to cover long areas quickly.

Notes

- Fire retardant as per ASTM 726
- Avoid high-heat applications
- Ensure that disposal of these sorbents complies with all regulations.

* Basis weights and recycled content are ± 5%

** Measures a case/bale using ASTM 726 (long test) with medium viscosity oil and tap water. Statistical average derived from real time production QC data.

*** Weight per case ± 0.5 kg/lbs.

Compliance

Related Regulations	Description
29CFR 1910.22(a)(2)	"The floor of every workroom shall be maintained in a clean and, so far as possible, a dry condition."
29CFR 1910.120(j)(1)(vii)	"...suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks or ruptures may occur."
29CFR 1910.107(g)(2)	"All spraying areas shall be kept as free from the accumulation of deposits of combustible residues as practical."